


# Z1U- V05- a7 (170 °) - 9000K



## - LIGHT DISTRIBUTION (170 °)

### Luminous Intensity Distribution

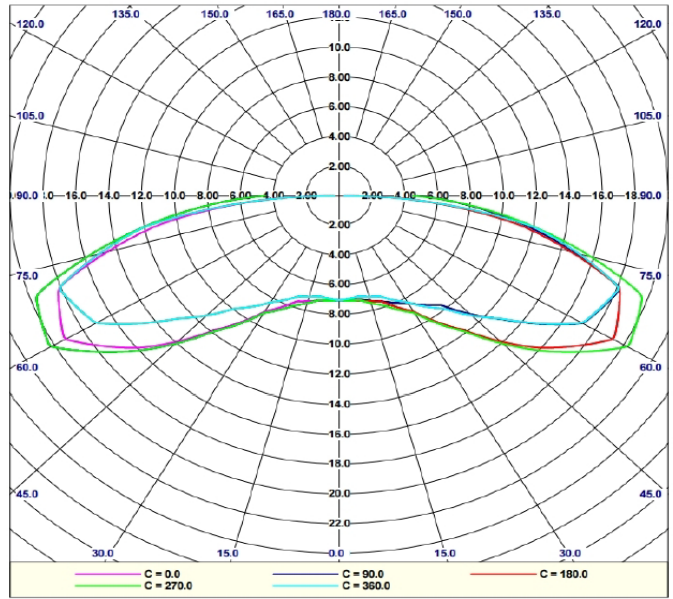

## -FEATURES -


- KOREA LED 2835 CHIP
- Wide beam Angle 170°
- Reserve voltage protection circuit
- Wide viewing angle for even light flux
- Capable of wet exposed applications with Durable weather protective molding
- Pre-applied adhesive tape and screw mounting bolt
- Safety Operation with DC 12V

## - CERTIFICATIONS-



CE, UL(E349550), RoHs, KC, IP68, CB, BIS

## - PRODUCTION DEMENTION & PACKAGE -



Dementions	Wire Length	Zipper polybag / Q'ty	Outer Box /Q'ty
26X23X7.0	80mm (3.15inch)	200pcs/bag	2,000pcs/box

## - SPECIFICATION -

Operation Votage	Power Consumption	Current	Viewing Angle	Intensity		Operation Temperature	Storage Temperature	Water Proof
				Lm/W	Lm			
DC12V	1.2W	100mA	170 °	88	105	-20 °C~60 °C (-4 °F~140 °F)	-40 °C~75 °C (-40 °F~167 °F)	IP68